

T - flex profiles

for the installation of the ventilated facade carcass

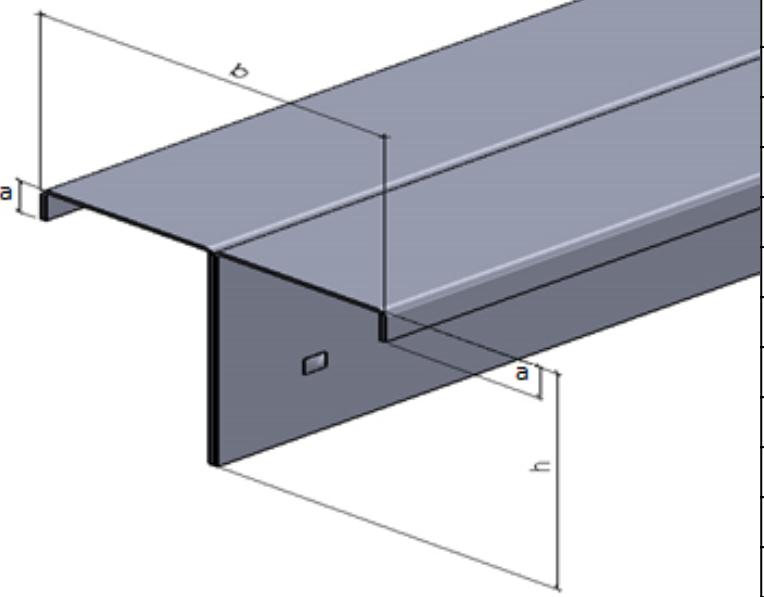


LANK META

LANKSTYTI METALO PROFILIAI
 Trakiškio g. 9, LT-35115 Panevėžys, Lithuania
 Phone: +370 455 02310
 Email: info@lankmeta.lt

Profile type	Title of the profile	Code for ordering	Metal type	Metal thickness, mm	Profile characteristics, mm			
					b	h		Length Lmax
T - flex profiles								
	T-flex(50/30/50/30)x0,8	T-flex 60	DX51D+Z275	0.8	60	50		6000
	T-flex(50/30/50/30)x1,0		S350GD+Z275	1	60	50		6000
	T-flex(50/30/50/30)x1,2		S350GD+Z275	1.2	60	50		6000
	T-flex(50/40/50/40)x0,8	T-flex 80	DX51D+Z275	0.8	80	50		6000
	T-flex(50/40/50/40)x1,0		S350GD+Z275	1	80	50		6000
	T-flex(50/40/50/40)x1,2		S350GD+Z275	1.2	80	50		6000
	T-flex(50/50/50/50)x0,8	T-flex 100	DX51D+Z275	0.8	100	50		6000
	T-flex(50/50/50/50)x1,0		S350GD+Z275	1	100	50		6000
	T-flex(50/50/50/50)x1,2		S350GD+Z275	1.2	100	50		6000
	T-flex(50/60/50/60)x0,8	T-flex 120	DX51D+Z275	0.8	120	50		6000
	T-flex(50/60/50/60)x1,0		S350GD+Z275	1	120	50		6000
	T-flex(50/60/50/60)x1,2		S350GD+Z275	1.2	120	50		6000

We can also produce profiles in accordance with specifications b and h provided by the client.

Profile type	Title of the profile	Code for ordering	Metal type	Metal thickness, mm	Profile characteristics, mm			
					b	h	a	Length Lmax
T - flex profiles with strengthened edges								
	T1-flex(50/30/11/50/30/11)x0,8	T1-flex 60	DX51D+Z275	0.8	60	50	11	6000
	T1-flex(50/30/11/50/30/11)x1,0		S350GD+Z275	1	60	50	11	6000
	T1-flex(50/30/11/50/30/11)x1,2		S350GD+Z275	1.2	60	50	11	6000
	T1-flex(50/40/11/50/40/11)x0,8	T1-flex 80	DX51D+Z275	0.8	80	50	11	6000
	T1-flex(50/40/11/50/40/11)x1,0		S350GD+Z275	1	80	50	11	6000
	T1-flex(50/40/11/50/40/11)x1,2		S350GD+Z275	1.2	80	50	11	6000
	T1-flex(50/50/11/50/50/11)x0,8	T1-flex 100	DX51D+Z275	0.8	100	50	11	6000
	T1-flex(50/50/11/50/50/11)x1,0		S350GD+Z275	1	100	50	11	6000
	T1-flex(50/50/11/50/50/11)x1,2		S350GD+Z275	1.2	100	50	11	6000
	T1-flex(50/60/11/50/60/11)x0,8	T1-flex 120	DX51D+Z275	0.8	120	50	11	6000
	T1-flex(50/60/11/50/60/11)x1,0		S350GD+Z275	1	120	50	11	6000
	T1-flex(50/60/11/50/60/11)x1,2		S350GD+Z275	1.2	120	50	11	6000

We can also produce profiles in accordance with specifications b and h provided by the client.

T-flex profiles are produced by connecting two L-shaped profiles by cold punching.